

ECL Playground

Boca Raton Documentation Team



ECL Playground

Boca Raton Documentation Team

Copyright © 2024 HPCC Systems®. All rights reserved

We welcome your comments and feedback about this document via email to <docfeedback@hpccsystems.com>

Please include **Documentation Feedback** in the subject line and reference the document name, page numbers, and current Version Number in the text of the message.

LexisNexis and the Knowledge Burst logo are registered trademarks of Reed Elsevier Properties Inc., used under license.

HPCC Systems® is a registered trademark of LexisNexis Risk Data Management Inc.

Other products, logos, and services may be trademarks or registered trademarks of their respective companies.

All names and example data used in this manual are fictitious. Any similarity to actual persons, living or dead, is purely coincidental.

2024 Version 9.6.4-1

ECL Playground	4
Using the ECL Playground	5

ECL Playground

This manual covers the ECL Playground which is a component found in ECL Watch.

Figure 1. The ECL Playground in ECL Watch

The screenshot displays the ECL Watch ECL Playground interface. At the top, the 'ECL Watch' logo and navigation icons are visible. The main area is divided into three sections:

- Code Editor:** Contains ECL code for defining a record, a dataset, and sorting it in various ways. The code is as follows:

```
1 MyRec := RECORD
2   STRING1 Value1;
3   STRING1 Value2;
4 END;
5
6 SomeFile := DATASET({{
7   'C', 'G'
8   'C', 'C'
9   'A', 'X'
10  'B', 'G'
11  'A', 'B'
12 }, MyRec);
13 SortedRecs1 := SORT(SomeFile, Value1, Value2);
14 SortedRecs2 := SORT(SomeFile, -Value1, Value2);
15 SortedRecs3 := SORT(SomeFile, Value1, -Value2);
16 SortedRecs4 := SORT(SomeFile, -Value1, -Value2);
17 SortedRecs5 := SORT(SomeFile, Value2, Value1);
18 SortedRecs6 := SORT(SomeFile, -Value2, Value1);
19 SortedRecs7 := SORT(SomeFile, Value2, -Value1);
20 SortedRecs8 := SORT(SomeFile, -Value2, -Value1);
21 OUTPUT(SortedRecs1);
22 OUTPUT(SortedRecs2);
```
- Workflow Diagram:** Shows two parallel paths. Each path starts with an 'Inline Dataset' (containing 5 records), followed by a 'Sort' operation (with parameters +300, -100), and ends with an 'Output Result' (Output Result #1 and Output Result #2).
- Data Table:** Displays the output of the first sort operation. It has columns for row number (##), value1, and value2. The data is as follows:

##	value1	value2
1	C	C
2	C	G
3	B	G
4	A	B
5	A	X

At the bottom, there are controls for 'Submit', 'Target' (set to 'thor'), and a 'completed' status. Below the table, there are options for 'Refresh', 'Download' (Zip, GZip, XLS, CSV), and a 'Filter' dropdown. The table shows '1 - 5 of 5 results' and a pagination control set to '50'.


Using the ECL Playground

ECL Playground is a tool hosted on an ESP server. A page runs in your browser, allowing you to access and execute self-contained ECL code on your HPC Systems platform without the use of any other tools. The ECL Playground then shows you the results and the graph in your browser. The view is very similar to what the ECL IDE displays.

Accessing ECL Playground


ECL Playground is installed with the HPC Systems platform. You can access it through the ECL Watch page.

1. In your browser, go to the **ECL Watch** URL. For example, `http://nnn.nnn.nnn.nnn:8010`, where `nnn.nnn.nnn.nnn` is your ESP server node's IP address.

	Your IP address could be different from the ones provided in the example images. Please use the IP address of your node.
---	---

2. From ECL Watch, click on the **ECL** icon, then click the **Playground** link from the navigation sub-menu.

Figure 2. ECL Playground link

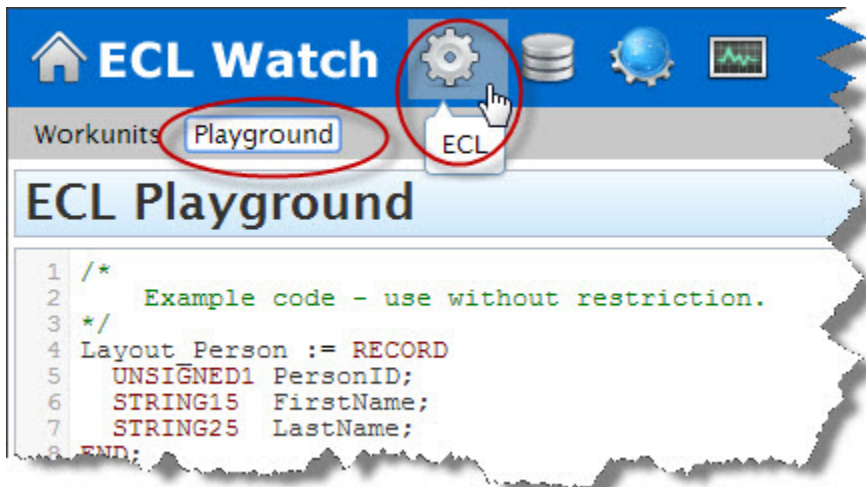


The ECL Playground displays.

Introducing the ECL Playground

The ECL Playground page is a work area where you can see and run self-contained ECL code. You can see the code, submit it, and see the results. You can even change the code and resubmit it to instantly see the new results right in your browser. This is an ideal tool for the user who is not an ECL programming expert who wants to change some of the ECL code and see the results.


Figure 3. The ECL Playground

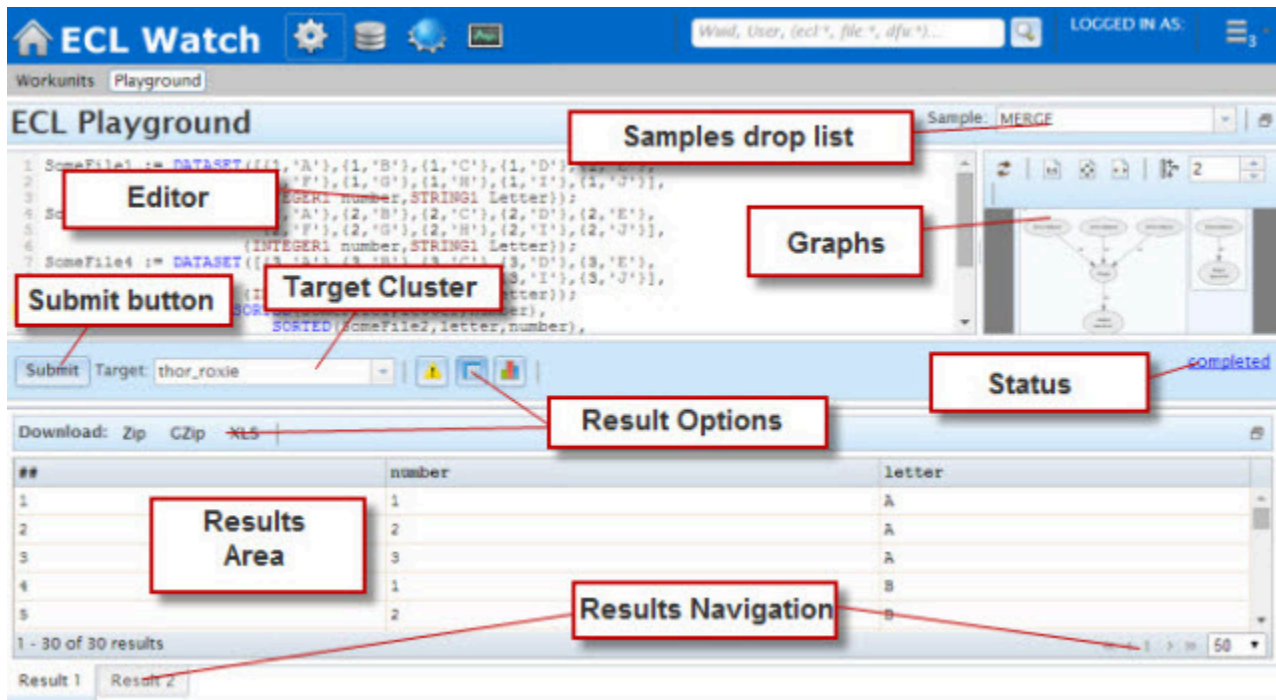

The ECL Playground page is divided into areas. The top portion contains the *Editor* area and the *Graph Viewer*. The Sample code drop list is at the top right. The bottom portion of the page displays the results.

The ECL Playground comes with a set of ready to run sample ECL code. The drop list contains code samples. Select any one of these samples and it loads in the editor.

Figure 4. Sample drop list

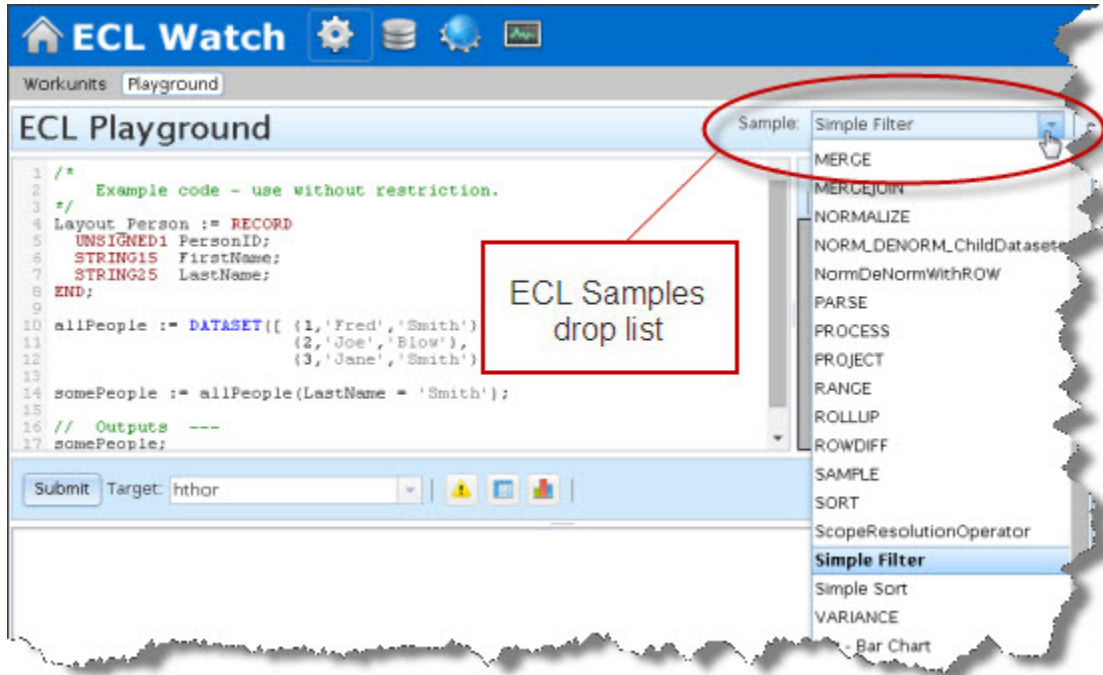

The selected code displays in the *Editor* area. You can then submit it as-is, or modify and submit. The results display at the bottom portion of the page.

Running ECL Code

To run the selected sample code, choose a target cluster from the drop list, then press the **Submit** button.

A successful run displays the word **completed** as the status and the results display in the results viewer. You can also view the graph in the upper right.

Figure 5. Success

The screenshot shows the ECL Watch Playground interface. At the top, there's a blue header with the ECL Watch logo and navigation icons. Below that, the 'Workunits' section shows 'Playground' and a 'Sample' dropdown set to 'JOIN_dupes'. The main area is divided into a code editor on the left and a graph visualization on the right. The code editor contains the following ECL code:

```
1 set1 := [1,2,3,4,5,6,7,8,9,10];
2 set2 := [10,20,30,40,50,60,70,80,90,100];
3
4 r1 := {integer1 fred};
5 r2 := {integer1 fred,integer1 sue};
6 ds1 := dataset(set1,r1);
7
8 ds2 := dataset(set2,r1);
9
10 r2 XF(ds1 L, ds2 R) := transform
11   self.fred := L.fred;
12   self.sue := R.fred;
13 end;
```

The graph visualization on the right shows a flow from 'Dataset 1' and 'Dataset 2' to a 'Join' node, which then feeds into a 'Result' node. A red box labeled 'Graph' points to this visualization. Below the code editor, there's a 'Submit' button (circled in red) and a 'Target' dropdown set to 'hthor'. To the right of the 'Submit' button, there's a 'completed' status indicator (circled in red). Below the 'Submit' button, there's a 'Download' section with options for 'Zip', 'CZip', and 'XLS', and a 'Filter' dropdown. The main part of the interface is a table with the following data:

##	fred	sue
1	1	10
2	1	20
3	1	30
4	1	40
5	1	50

At the bottom of the table, it says '1 - 50 of 100 results' and has pagination controls showing '1' of '50' results.

A completed job generates a graph. You can examine the graph in greater detail by double-clicking the graph to zoom in. You can also zoom in with the mouse wheel. A double-click on a blank area of the graph will zoom out. You can use the scroll bars on the border of the graph to navigate or you can drag the graph with your mouse.

Selecting a node in the graph highlights the relevant section of the code in the Editor. This is helpful in troubleshooting or modifying code since it shows you the code that corresponds to a node in the graph.

Figure 6. Error

The screenshot shows the ECL Playground interface. At the top, the title is "ECL Playground" and the sample name is "JOIN_dupes". The code editor contains the following ECL code:

```
r2 := {integer1 fred, integer1 sue};  
ds1 := dataset(set1, r1);  
ds2 := dataset(set2, r14);  
XF(ds1 L, ds2 R) := transform  
  self.fred := L.fred;  
  self.sue := R.fred;  
end;  
:= JOIN(ds1, ds2, right.fred % 2 = 0, XF(left  
output(j)
```

The code editor has several lines highlighted in red, indicating errors. A box labeled "Error Indicators" points to these lines. Below the code editor is a "Submit" button and a "Target" dropdown set to "hthor". To the right of the submit button is a "failed" status indicator. Below the submit button is a table of error messages:

Severity	Source	Code	Message	Col	Line	File Name
Error	ecfcc	2167	Unknown identifier "r14"	21	8	stdin:
Error	ecfcc	2167	Unknown identifier "R"	18	10	stdin:
Error	ecfcc	2025	SELF not legal here	3	12	stdin:
Error	ecfcc	2167	Unknown identifier "sue"	8	12	stdin:
Error	ecfcc	3002	syntax error near "end"	1	13	stdin:
Error	ecfcc	3002	syntax error near "ds2": ...	15	15	stdin:

At the bottom of the interface, there are checkboxes for "Error(s)", "Warning(s)", and "Info".

The status area displays the job status. If a job fails, errors display in the result viewer and the code is highlighted in red in the *Editor*. If there are warnings they are displayed in yellow.

Analyze the results

When running ECL Code that has multiple results, each result is on a separate tab. Select a tab to see that set of results. You can also change number of results displayed or page through the results with the links at the bottom.

Figure 7. Multiple results

The screenshot displays the ECL Playground interface. At the top, the title "ECL Playground" is visible, along with a "Sample: ENTH" dropdown menu. The main area contains a code editor with the following ECL code:

```
1 SomeFile := DATASET({'A'},{'B'},{'C'},{'D'},{'E'},  
2                 {'F'},{'G'},{'H'},{'I'},{'J'},  
3                 {'K'},{'L'},{'M'},{'N'},{'O'},  
4                 {'P'},{'Q'},{'R'},{'S'},{'T'},  
5                 {'U'},{'V'},{'W'},{'X'},{'Y'},  
6                 (STRING1 Letter));  
7  
8 Set1 := ENTH(SomeFile,2,10,1);  
9 Set2 := ENTH(SomeFile,2,10,2);  
10 Set3 := ENTH(SomeFile,2,10,3);  
11 Set4 := ENTH(SomeFile,2,10,4);  
12 Set5 := ENTH(SomeFile,2,10,5);  
13
```

Below the code editor, there is a "Submit" button and a "Target: hthor" dropdown. The status "completed" is shown in the top right. A "Download" section offers options for Zip, GZip, and XLS, along with a "Filter" dropdown. The results table is currently empty, with columns labeled "##" and "letter". A red box labeled "Results Navigation" points to the navigation controls at the bottom of the table. These controls include a "1 - 5 of 5 results" indicator, a set of buttons for "Result 2", "Result 3", "Result 4", and "Result 5", and a pagination control showing "50" with navigation arrows. The "Result 2" button and the pagination control are circled in red.

ECL from a Workunit

You can access ECL code from inside a Workunit Details page in ECL Watch.


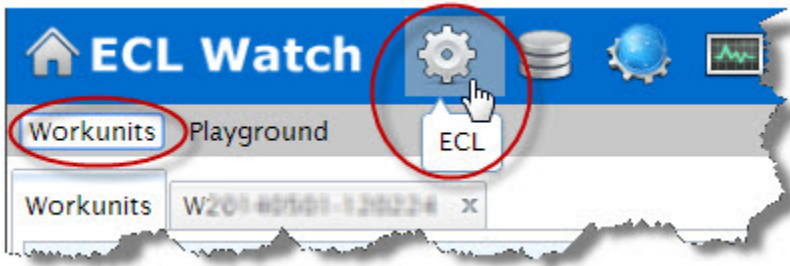
1. Select **Workunits** from the ECL Watch  menu.

Figure 8. Browse Workunits



2. Click on a workunit hyperlink to open the Workunit Details page.
3. Click on the **ECL** tab to view the workunit's ECL code.

Figure 9. ECL link

